

# VELVET Light 4 Studio IP51



Ref.: VL4STNY

Datasheet: October 2023 / Page 1

## 4x1 feet bicolor dustproof AC powered soft light LED panel

[Click here for more product information](#)



1. XLR-3 DC IN
2. Power switch
3. + / - Adjustment buttons
4. 3200K / 5600K Quick access button
5. Mode selection button (Dimmer / Colour Temp)
6. XLR DMX-5 IN
7. Digital display
8. XLR-5 DMX Out




# VELVET Light 4 Studio IP51



Ref.: VL4STNY

Datasheet: October 2023 / Page 2

SPECIFICATIONS	
COLOUR TEMPERATURE	Aadjustable from 2700K to 6500K (100K increments)
LIGHT INTENSITY	Dimmable 0 to 100 (smooth and flicker-free)
LOCAL CONTROL	Shock proof buttons and display
WIRE CONTROL	DMX-RDM with XLR-5 In & Out connectors
TLCI INDEX	95 at 3270K and 95 at 5740K
PHOTOMETRICS	11267 lux / 1046 fc at 1m / 3 feet 1476 lux / 137 fc at 3m / 10 feet 463 lux / 43 fc at 6m / 20 feet
BEAM ANGLE	100°
DIMENSIONS	1250x308x68mm / 49.2"x12.1"x2.7" (panel) 1132x485x68mm / 44.6"x19"x2.7" (panel + yoke)
WEIGHT	11 kg / 24,25 lbs (panel) 14.8 kg / 32,6 lbs (panel + center mount + power supply)
POWER DRAW	322W (1.40A at 220VAC — 2.90A at 110VAC)
POWER SUPPLY	26-28V DC/ 90-264V AC 50/60Hz
LED RATED LIFE	More than 50.000 hours L70 More than 35.000 hours L80
POWER CONNECTION	Neutrik XLR-3 DC In connector
OUTPUT FREQUENCY	2000 fps
OPERATION TEMPERATURE	From -20°C to +40°C
COOLING	No-noise, fan-free passive cooling
PROTECTION	IP51 dustproof, indoor or outdoor protected use
VELVET LED TECHNOLOGY	Selected BIN LED + optic diffuser + CPU software control
RIGGING OPTIONS	Aluminum yoke with 16 female combined with 28 pin, quick link swivel ball head, pole operated yoke, multipanels yokes
QUICK MOUNTING ACCESSORIES	AC power supply, foldable Snapgrid, 40° and 20°, removable barn doors, hard case
CONSTRUCTION & FINISH	Black anodized extruded aluminum and black powder coated sheet aluminum

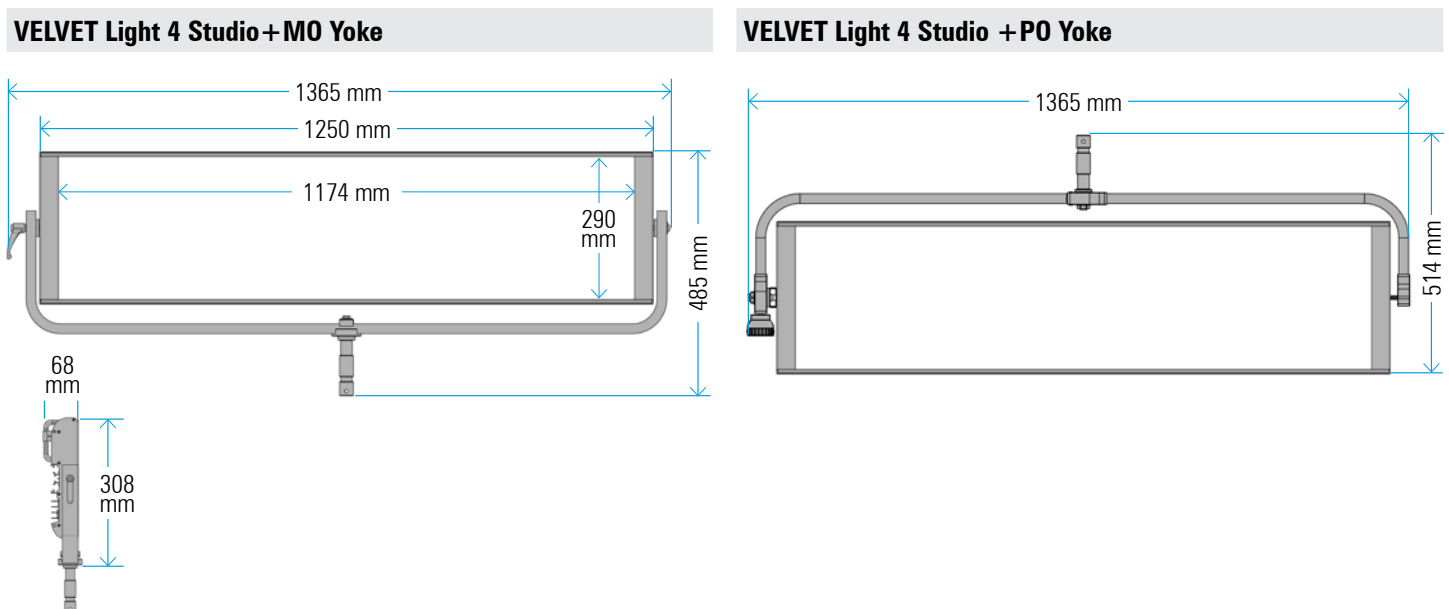


# VELVET Light 4 Studio IP51





Ref.: VL4STNY

Datasheet: October 2023 / Page 3



## PHOTOMETRICS

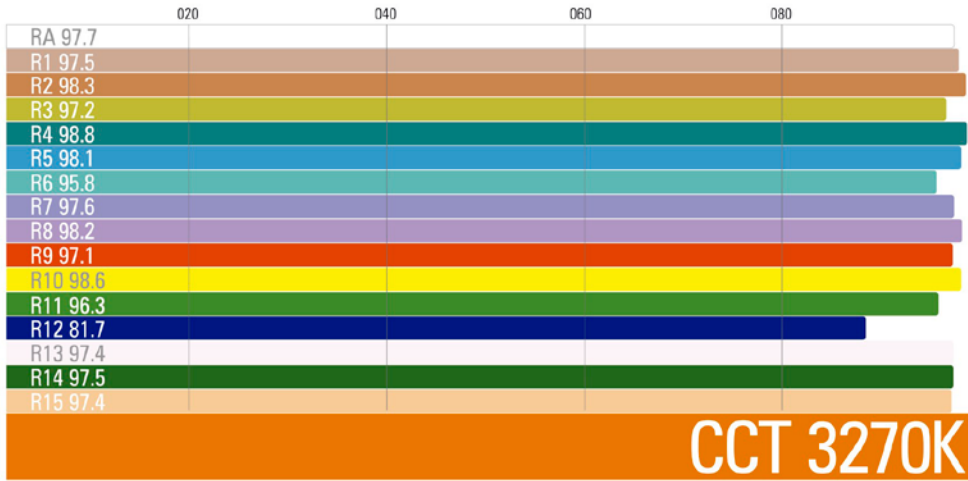

95

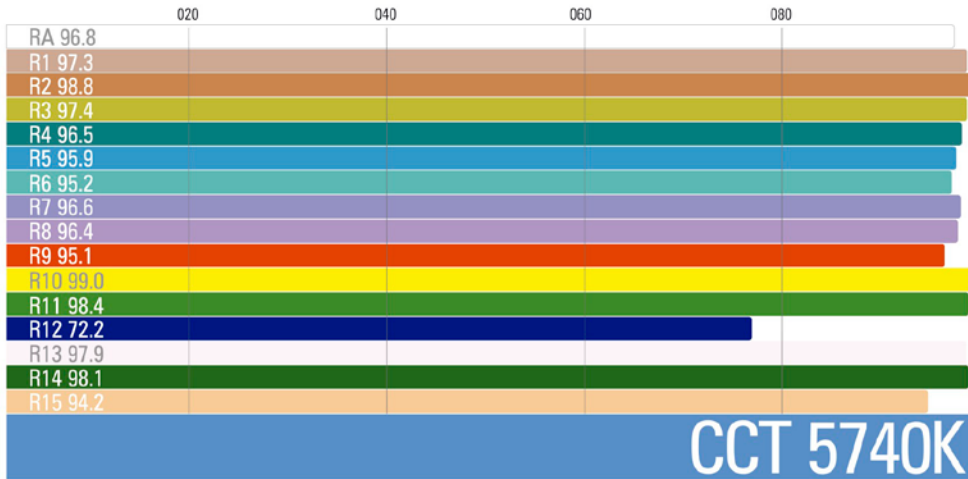

95

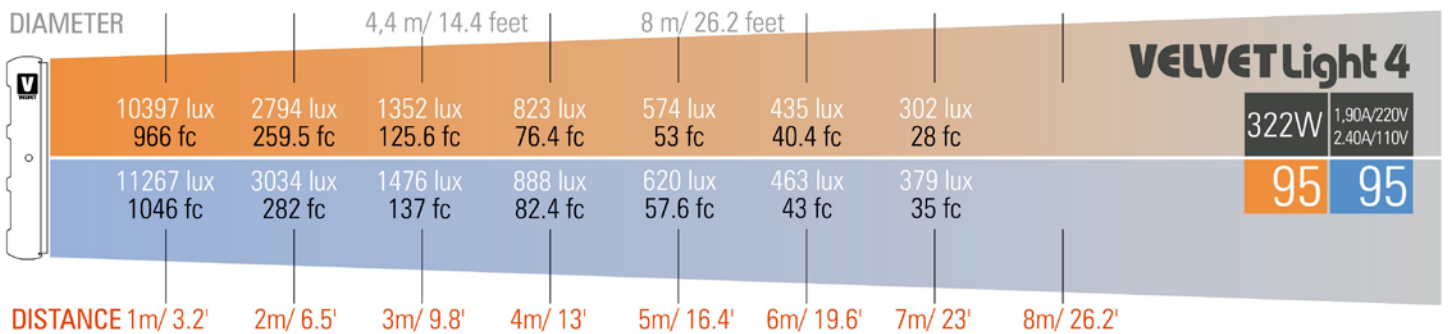












# VELVET Light 4 Studio IP51



Ref.: VL4STNY

Datasheet: October 2023 / Page 4

## ACCESSORIES

POWER SUPPLY	TRANSPORT	REMOTE CONTROL	
 VL4IP54-PSU	 VL4-CASE	 VL-RC	
BEAM CONTROL			
 VL4-RB	 VL4-SG	 VL4-SB	 VL4-SGXSB
RIGGING			
 VL4IP-PSUQLSSJ	 VL4-QLSSJ	 VL4-Y	 VL4-YPO