



KOSMOS 400 bicolor location

ref: VK400BC


Includes: manual yoke with Euro28 junior pin, power cord with Neutrik PowerCon TRUE1 connector



- 01 Digital display
- 02 Rotary selector buttons
- 03 2x XLR-5 (DMX IN and DMX OUT)
- 04 Antenna
- 05 XLR-3 DC in 26-48V connector
- 06 Main power switch
- 07 8A fuse
- 08 2x PowerCon TRUE1 TOP in and through connectors
- 09 USB connector
- 10 2x handles and security cable attachment

TECHNICAL SPECIFICATIONS

OPTICAL SYSTEM	motorized ZOOM Fresnel + changeable lampheads
LIGHT APERTURE	glass Fresnel lens 300mm / 12"
BEAM ANGLE	13° to 56° (half peak), motorized zoom with stepper motor
LIGHT INTENSITY	smooth 0 to 100%, four selectable dimming curves
COLOR TEMPERATURE	continuously adjustable from 2800K to 6600K
GREEN-MAGENTA	continuously adjustable (full Plusgreen to full Minusgreen)
COLOR RENDITION	typical 95 CRI / 95 TLCI
HIGH SPEED	over 12,000 fps
LIGHT ENGINE	35mm full Bicolor spectrum W+CW+G VELVET ceramic LED
COLOR CONTROL MODES	CTT: dimmer, kelvin and green/magenta
CONTROL (LOCAL)	2x rotary dials and full-color touchscreen display
CONTROL (WIRED)	Full DMX-RDM with XLR-5 IN & OUT connectors
CONTROL (WIRELESS)	LumenRadio CRMX, Wi-Fi Art-Net sCAN and Bluetooth, Android and IOS free VELVET Goya App
INTERFACE	TFT full-color display with touchscreen, 2 rotary dials with pushbutton
DIMENSIONS	495 x 320 x 320 mm / 19.5" x 12.5" x 12.5"
DIMENSIONS with yoke	495 x 455 x 320 mm / 19.5" x 17.9" x 12.6"
FIXTURE WEIGHT	9.3 kg / 20.5 lbs fixture - 9.8 kg / 22.6 lbs fixture + yoke
POWER	400W (3.7 Amps at 110 VAC) with PFC
AC INPUT VOLTAGE	90-264V AC 50/60Hz PowerCon TRUE1 TOP IN & OUT connectors
DC INPUT VOLTAGE	26-48V DC XLR-3 in connector
LED RATED LIFE (L70)	exceeds 50,000 hours
COOLING	passive liquid cooling system into sealed 3D chamber with silent fan
PROTECTION	IP30, indoor or outdoor protected use
CONSTRUCTION AND FINISH	fixture and yoke made of die-cast aluminum
RIGGING OPTIONS	aluminum yoke with universal junior 1-1/8" (28mm) outer diameter combined with baby receiver 5/8" (16mm), pole operated yoke

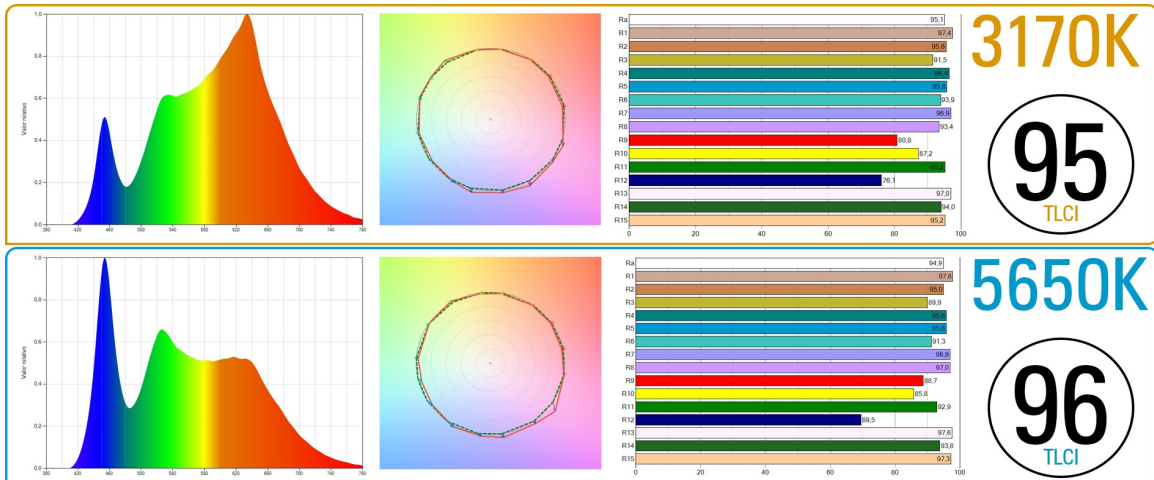



KOSMOS 400 bicolor location

ref: VK400BC

Includes: manual yoke with Euro28 junior pin, power cord with Neutrik PowerCon TRUE1 connector

