

2x1 feet bicolor IP41 AC powered soft light LED panel

Panel with on board AC Power Supply Unit.



1. Power-Con IN connector
2. Main power switch
3. XLR-5 DMX RDM In connector
4. XLR-5 DMX RDM Out connector
5. Plus and Minus buttons
6. Display
7. 3200K / 5600K quick access button
8. Mode selection





COLOUR TEMPERATURE	Continuously adjustable from 3.000K to 6.000K (100K increments)
LIGHT INTENSITY	Dimmable 0 to 100, smooth and flicker-free
LOCAL CONTROL	Shock proof buttons and display
WIRE CONTROL	DMX-RDM with XLR-5 In & Out connectors
TLCI INDEX	93 at 3200K and 94 at 5600K
PHOTOMETRICS	1000 Lux/ 92 fc at 2m/ 6 feet 500 Lux/ 46 fc at 3m/ 10 feet
BEAM ANGLE	100°
DIMENSIONS	685 x 308 x 68 / 27" x 12" x 2.6" (panel) 815 x 430 x 68 / 32" x 17" x 2.6" (panel+yoke)
WEIGHT	5,9kg / 13 lbs (panel) 6,5kg / 14 lbs (panel + yoke)
POWER DRAW	100W
POWER SUPPLY	90-264 VAC 50/60Hz
LED RATED LIFE	More than 50.000 hours L70 More than 35.000 hours L80
POWER CONNECTION	Neutrik PowerCon TRUE1 TOP In connector
OUTPUT FREQUENCY	2000 fps
OPERATION TEMPERATURE	From -20°C to +40°C
COOLING	No-noise, fan-free passive cooling
PROTECTION	IP41 index protection
VELVET LED CYC TECHNOLOGY	Selected BIN LED core unit + optic diffuser + CPU software control
RIGGING OPTIONS	aluminum yoke with 16 female combined with 28 pin, pole operated yoke, multipanels yokes
QUICK MOUNTING ACCESSORIES	Foldable SnapBag, foldable Snapgrid, removable barn doors, cordura case, hard case
CONSTRUCTION & FINISH	Black anodized extruded aluminum and black powder coated sheet aluminum


WIRE VIEW



PHOTOMETRICS

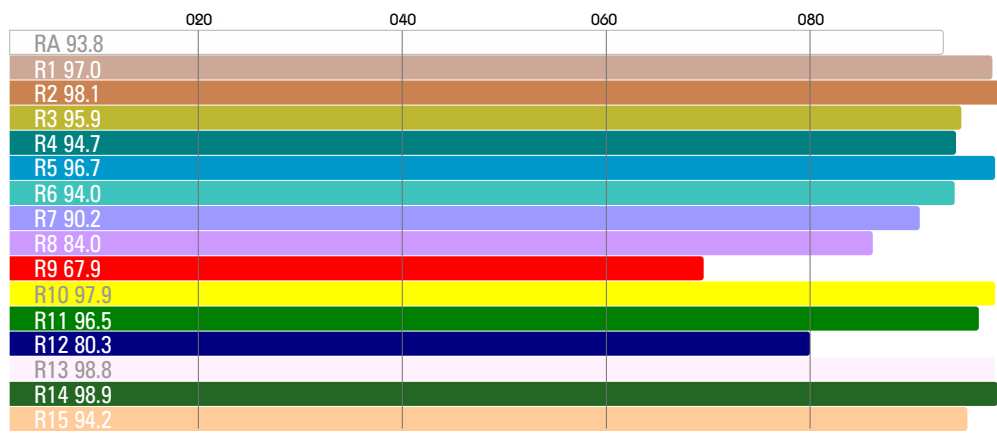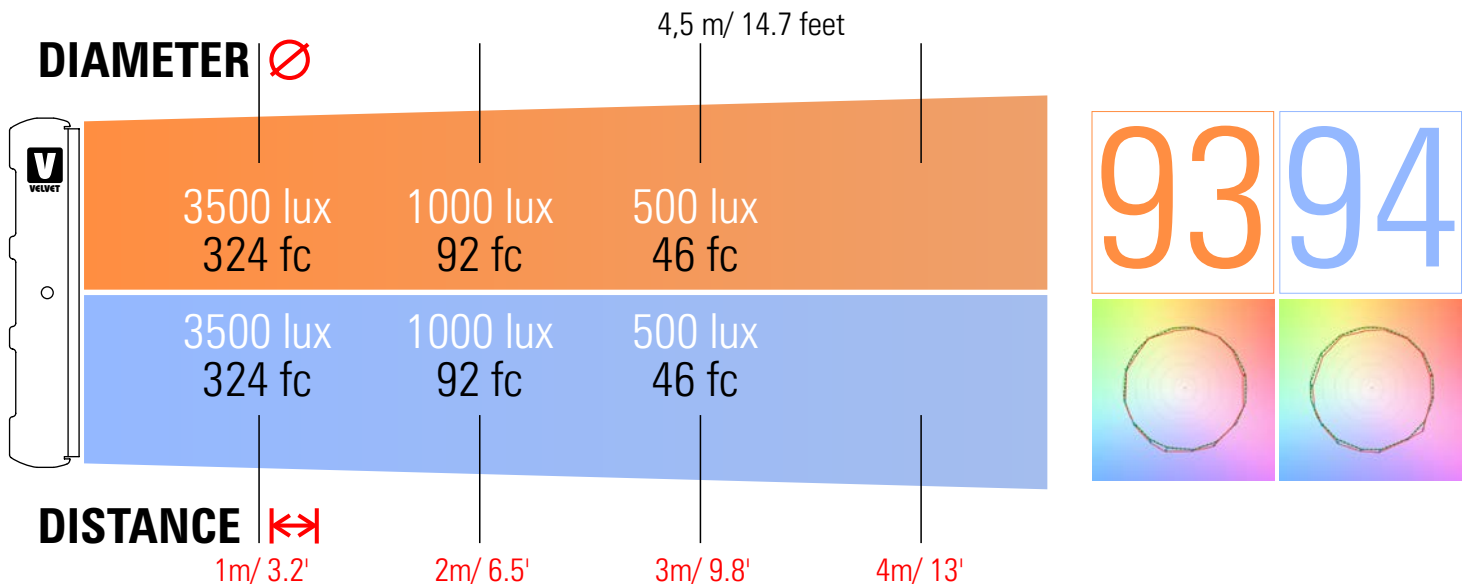

CCT 3241K

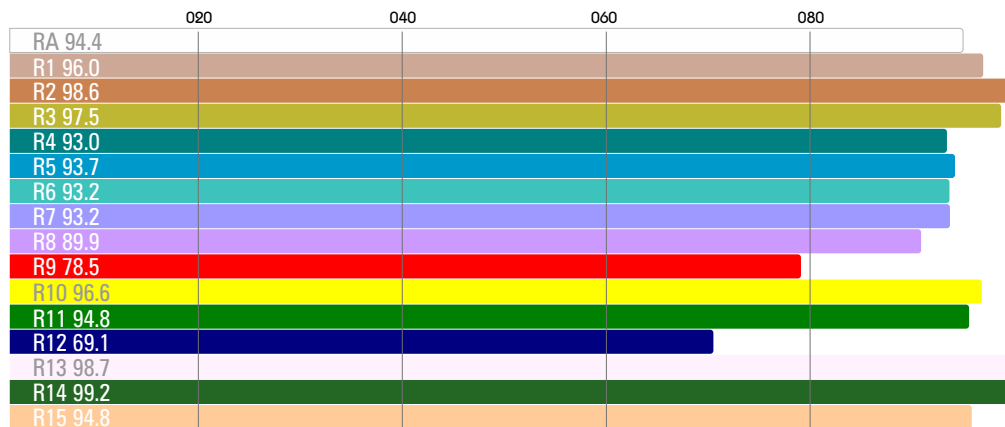

CCT 5683K

MANDATORY ACCESSORIES

YOKES	SPIGOTS AND CLAMPS
-------	--------------------



VP2-YT



VL2-YPO



THE-2816CTUBEK



EV-EURO28-T



V-CCLAMP

POWER CABLES			
--------------	--	--	--



ACC3.5M-TRUE1



ACC3.5M-TRUE1UK



ACC3.5M-TRUE1A



ACC3.5M-TRUE1BE

OPTIONAL ACCESSORIES

BEAM CONTROL	REMOTE CONTROL
--------------	----------------



VL2-RB



VL2-SG



VL2-SG20



VL-RC



VL2-SG60



VL2-SB



VL2-SGXSB

TRANSPORT	
-----------	--



VL2-BAG



VL2-CASE

DMX CABLES				
------------	--	--	--	--



DMX-DMX2M



DMX-DMX3M



DMX-DMX6M



DMX-DMX10M



DMX-DMX20M