VELVET Light

Weatherproof soft LED panels



guick and easy

VELVET Light series are the most sturdy and portable lights

Incredibly soft and wraparound. VELVET's quality to easily get beauty shots and natural portraits. Our light fixtures are designed to instantly setup & adjust.



Quality and professional white light with pure color rendition: VELVET Light series have a 96 CRI & TLCI to get perfect skin tones and real colors.

Absolutely consistency lamp to lamp to mix as many units as you wish to get exactly the same light quality and color reproduction.

- O User-friendly digital display with shock-resistant buttons.
- O Yoke with one-hand tilting lock knob ergonomic yoke.
- O Precise color temperature adjustement from 27K to 65K. Dedicated 32/56K guick button.





powerful, silent

VELVET Light use no fans

VELVET Light can be powered with any universal battery or AC. Using the best quality LED, exclusive electronics and custom designed aluminum heat-sink the led is kept in the optimum temperature to last 50.000 hours

Ready to rig

- O Yoke with ergonomic just one hand tilt lock
- O Ball head rapid mounts
- O 1/4-20" threads located on top and bottom
- O 4 holes for safety sling or to hang the fixture



studio series

Advanced DMX Master/Slave

DMX remote control even without a controller!

With the Master-Slave function you can link several units and operate without a console. The Master will be the controller for the other units.

Bi-directional DMX RDM

The perfect solution on Studio simplifying the assignment and channel addressing of every fixture.





natural soft light

Incredibly soft and wraparound quality light to easily get beauty shots and natural portraits. VELVET Light is as efficient as to deliver up to 1450 Lux/ 137 Footcandles of soft light at 3 meters drawing only 322W.

The natural soft beam is easy to use, produce no shadows on the actors faces and does no disturb their eyes.

The light evenness and power make VELVET Light the right choice on lighting backgrounds, as space light and invaluable on location as an all-purpose.

made to last


Robust 100% aluminum body and IP54

made and designed in Barcelona to endure the toughest working conditions on any situation. VELVET use the best quality LED, exclusive electronics and custom design.








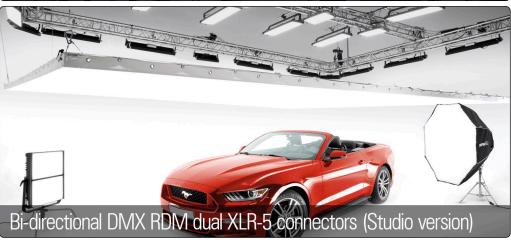

VELVET Light

technical specifications

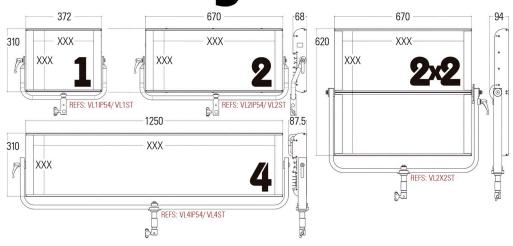

VL1ST 3.5 Kg / 7.7 lbs 100W VL1IP54 VL2IP54 6 Kg / 13.2 lbs 12 Kg / 26.5 lbs 310W WEIGHT 11 Kg / 24 lbs 322W 3.5 Kg / 7.7 lbs 100W 6 Kg / 13.2 lbs 11 Kg / 24 lbs 322W POWER DRAW 160W 160W **POWER SUPPLY** 0.90A 110 VDC 0.90A 110 VDC 1.45A 110 VDC 1.45A 110 VDC 2.8A 110 VDC 2.90A 110 VDC 2.90A 110 VDC 0.40A 230 VAC 0.40A 230 VAC 0.70A 230 VAC 24-35 VDC 0.70A 230 VAC 1.35A 230 VAC 1.40A 230 VAC 1.40A 230 VAC POWER OPTIONS 12-35 VDC 90-264 VAC 26-28 VDC 90-264 VAC 90-264 VAC 90-264 VAC 90-264 VAC 90-264 VAC 90-264 VAC

COLOUR TEMPERATURE LIGHT INTENSITY BEAM ANGLE LED RATED LIFE & TECHNOLOGY

CCT 3270K

Continuously adjustable from 2.700K to 6.500K in 100K steps Dimmable 0 to 100, smooth and flicker-free

100% More than 50.000h. Selected BIN LED Core unit + Optic diffuser + CPU software control

OUTPUT FREQUENCY 16KHz/ flicker-free up to 2000fps

OPERATION TEMP & COOLING From -20°C to +40°C with no-noise, fan-free passive cooling
IP PROTECTION IP54 Location models and IP51 Studio models


RIGGING OPTIONS Aluminum yoke with 16 female combined with 28 pin, swivel ball head, pole operated yoke...

CONSTRUCTION & FINISH Black anodized extruded aluminum and black powder coated sheet aluminum

photometrics and graphics **Ø DIAMETER** 7 m/ 23 feet 302 fc 81 fc 39.2 fc 24 fc 16.6 fc 12.6 fc 8.7 fc 327 fc 88 fc 42.8 fc 25.7 fc 18 fc 13.3 fc 11 fc Light 1 100W **ODIAMETER** 7 m/ 23 feet V 522 fc 68 fc 29 fc 22 fc 15 fc 139 fc 41.3 fc 647 fc 23.2 fc 151 fc 73 fc 44.6 fc 31 fc 19 fc Light 2 160W **⊘** DIAMETER 8 m/ 26.2 feet v 966 fc 259.5 fc 125.6 fc 76.4 fc 53 fc 40.4 fc 28 fc 1046 fc 82.4 fc 43 fc 282 fc 137 fc 57.6 fc 35 fc Light 4 322W **ØDIAMETER** 5 m/ 16.4 feet 9 m/ 29.5 feet M 992 fc 266.5 fc 78.6 fc 54.7 fc 41.5 fc 129 fc 29 fc 1075 fc 289 fc 140.8 fc 84.7 fc 59 fc 44 fc 36.2 fc Light 2:2 310W 2m/6.5 4m/13' 5m/ 16.4' **k**→ DISTANCE 1m/3.2 3m/9.8 6m/ 19.6^t 7m/23

CCT 5740

VELVET Light

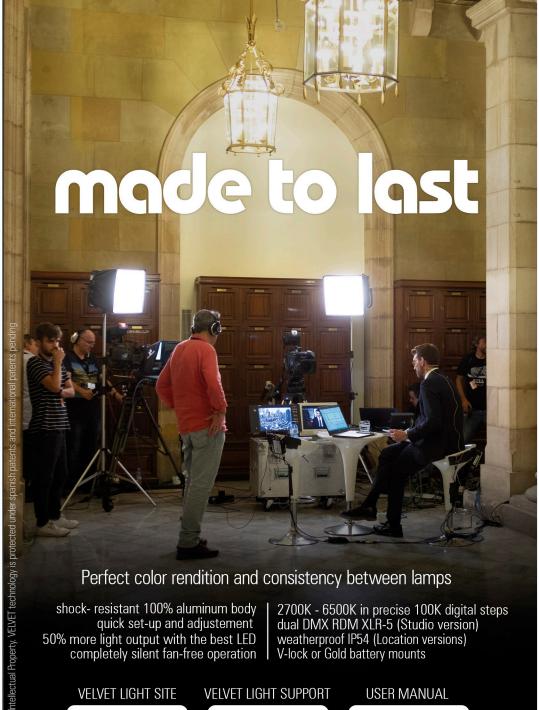

VELVET LIGHT SITE



VELVET LIGHT SUPPORT



USER MANUAL



European quality with 2 years warranty. 100% designed & made in Europe



velvetlight.tv